
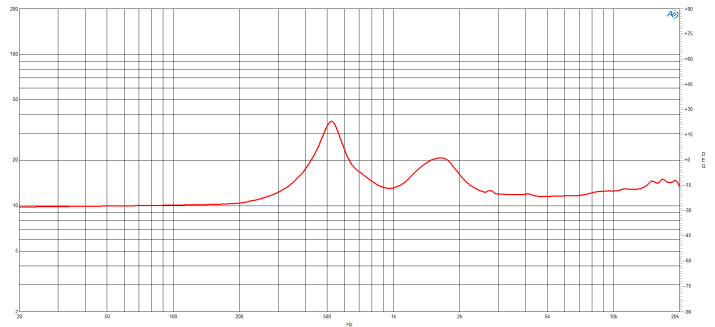


- 220 W continuous program power capacity
- 1.4" horn throat diameter
- 75 mm (3 in) aluminum voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 109 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

While shrink-ray technology may not have escaped the 1990s, we have succeeded in creating two more highly compact drivers, not only permitting close spacing but also reducing weight and cost at the same time. In a larger, 3" coil we now offer the DE780: Designed with a sonic character like our famous DE900TN, but in a 112mm diameter package weighing only 3.5 lb (1.6kg). Continuous power handling of 220W combined with 108dB sensitivity primes this driver for consideration in a new generation of lighter, more compact line array loudspeakers.

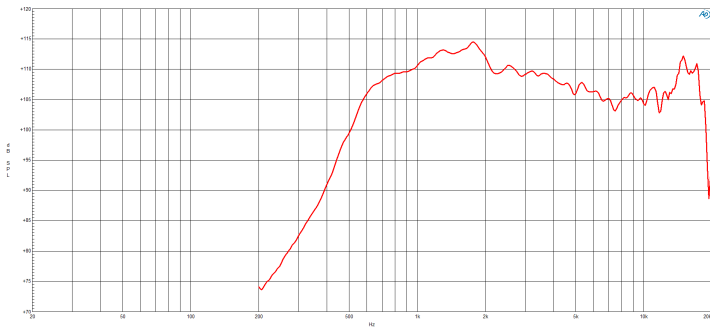

## SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	16 $\Omega$
Minimum Impedance	11.5 $\Omega$
Nominal Power Handling	110 W 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.
Continuous Power Handling	220 W Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
Sensitivity	109 dB Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.
Frequency Range	0.5 kHz - 18 kHz
Recommended Crossover	1.2 kHz 12 dB/oct. or higher slope high-pass filter.
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.22 mH
Flux Density	1.95 T
Diaphragm Material	Titanium
Min Frequency Range	0.5 kHz
Max Frequency Range	18 kHz

## SERVICE KITS

HF replacement-diaphragm	MMD3FTN16M
--------------------------	------------

## MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Other details	4x M6 Mounting Studs with bolts and washers included
Overall Diameter	112 mm (4.41 in)
Depth	56 mm (2.2 in)
Net Weight	1.6 kg (3.53 lb)
Shipping Units	1 pcs
Shipping Weight	1.64 kg (3.6 lb)
Shipping Box	120x120x65 mm (4.72x4.72x2.56 in)